

Delivery Manager Tool - Information - How to exclude files for DOTNet analysis

Purpose

This page provide information how to exclude files for .Net analysis.

Applicable in CAST Version


Release	Yes/No
8.3.x	✓
8.2.x	✓
8.1.x	✓
8.0.x	✓
7.3.x	✓
7.2.x	✓
7.0.x	✗

Applicable RDBMS

RDBMS	Yes/No
Oracle Server	✓
Microsoft SQL Server	✓
CSS2	✓
CSS1	✗

Details

Files can be excluded from the analysis using DMT with the option "Folders or files to ignore" as mentioned below.

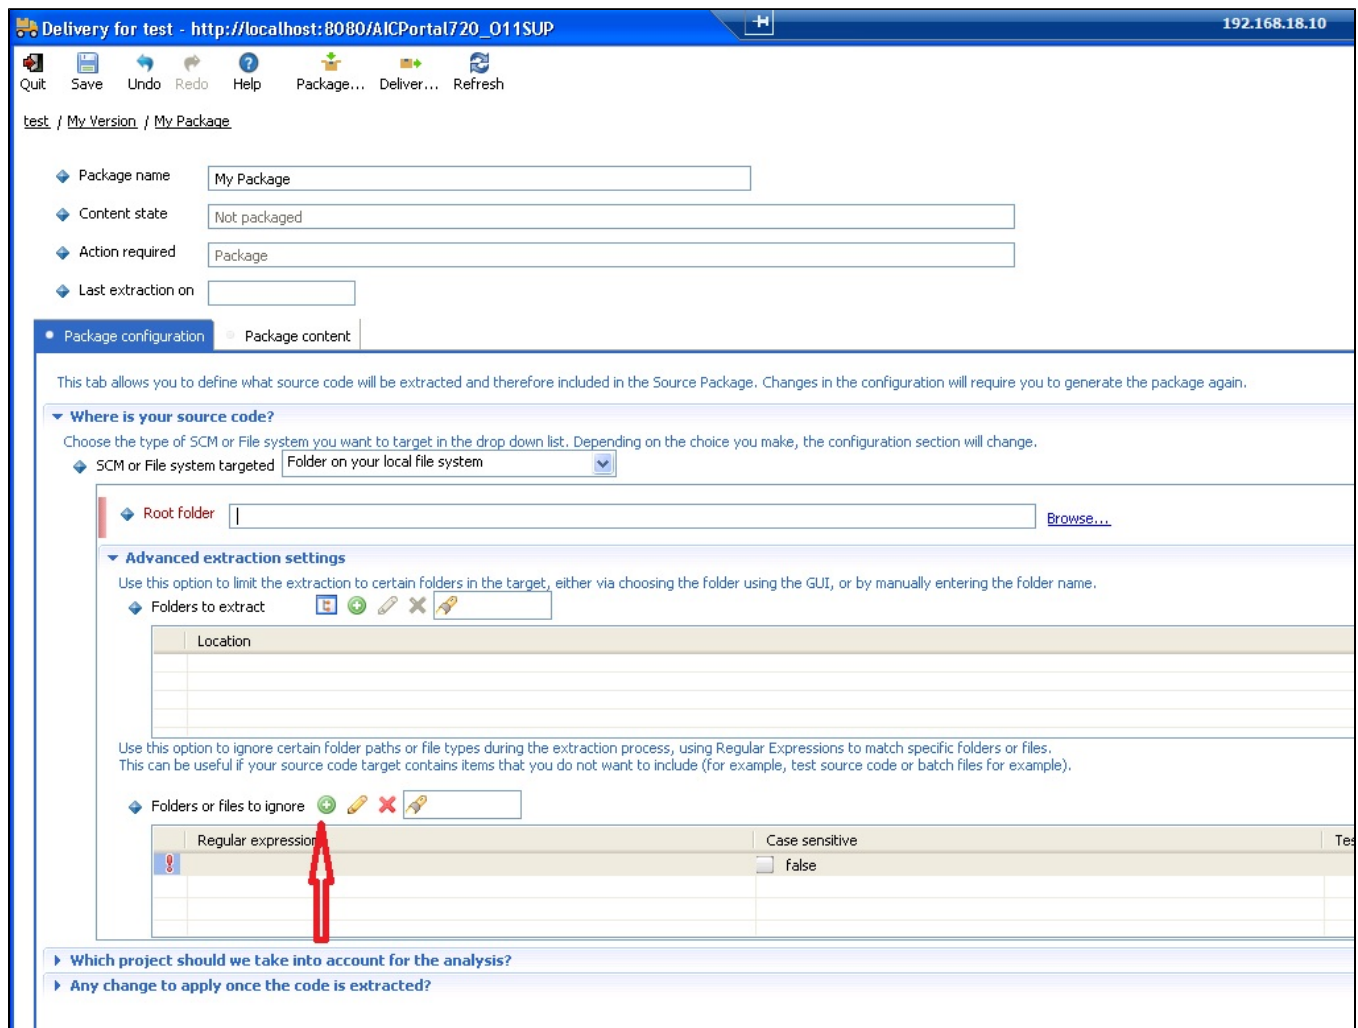

The screenshot shows the AIC Portal web interface for configuring a package. The browser title is "Delivery for test - http://localhost:8080/AICPortal720_011SUP" and the IP address is 192.168.18.10. The interface includes a menu bar with "Quit", "Save", "Undo", "Redo", "Help", "Package...", "Deliver...", and "Refresh". The breadcrumb is "test / My Version / My Package".

Configuration fields include:

- Package name: My Package
- Content state: Not packaged
- Action required: Package
- Last extraction on: (empty)

There are two tabs: "Package configuration" (selected) and "Package content".

The "Package configuration" tab contains the following sections:

- Where is your source code?**
Choose the type of SCM or File system you want to target in the drop down list. Depending on the choice you make, the configuration section will change.
SCM or File system targeted: Folder on your local file system
- Root folder**: (empty) [Browse...](#)
- Advanced extraction settings**
Use this option to limit the extraction to certain folders in the target, either via choosing the folder using the GUI, or by manually entering the folder name.
Folders to extract: (empty)
- Folders or files to ignore**
Use this option to ignore certain folder paths or file types during the extraction process, using Regular Expressions to match specific folders or files. This can be useful if your source code target contains items that you do not want to include (for example, test source code or batch files for example).
Folders or files to ignore: (empty)
- Table for Folders or files to ignore:**

Regular expression	Case sensitive	Test
!	<input type="checkbox"/> false	

At the bottom of the configuration section, there are two expandable sections:

- Which project should we take into account for the analysis?
- Any change to apply once the code is extracted?

However there will be some error/warning in analysis log for can not read files since it is still referenced in csproj.

There will be no impact and can be ignored, however to avoid this you can remove the reference from the csproj

Notes/comments

Related Pages